


# 508KL

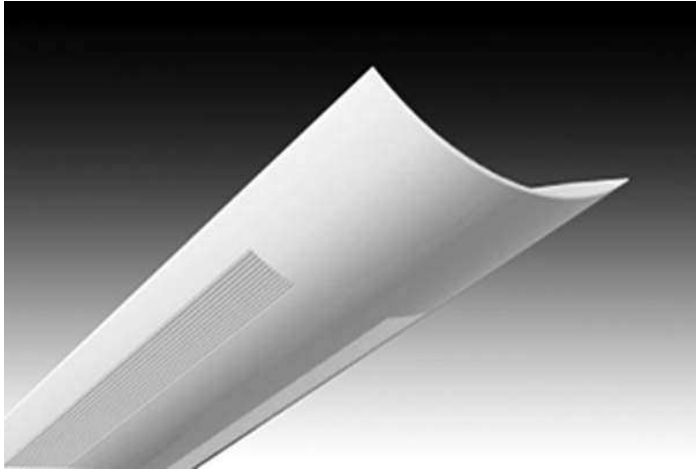

DATE \_\_\_\_\_

JOB NAME \_\_\_\_\_

TYPE \_\_\_\_\_

Features	Applications
<ul style="list-style-type: none"> <li>• Clean appearance</li> <li>• Continuous row capability</li> <li>• Steel housing and end caps with textured finish</li> <li>• Uses T8, T5, or T5HO</li> <li>• Direct/Indirect unit with perforated metal downlight slots</li> </ul>	<ul style="list-style-type: none"> <li>• Offices Areas</li> <li>• Retail Stores</li> <li>• Libraries</li> <li>• Restaurants</li> </ul>

Series	Size	Lamps	Watts	Voltage	Mounting	Options
<b>508KL</b>	<b>4FT</b> <b>8FT</b> <b>XFT</b> (CONTINUOUS ROW MOUNTING)	<b>2</b> <b>3 (T5 ONLY)</b>	<b>32WT8</b> <b>28WT5</b> <b>54WT5HO</b>	<b>120</b> <b>277</b> <b>UNV</b>	<b>AC</b> —Aircraft Cable (24", 36" standard, 48")	<b>EM</b> -Emergency Pack* (* <b>Must specify voltage</b> ) <b>EM2-2</b> Light Emergency* (* <b>Must specify voltage</b> ) <b>DB</b> -Dimming Ballast <b>SC</b> -Separate Circuit <b>CC</b> -Custom Color <b>BE</b> -Bullnose End Caps <b>SE</b> -Spade End Caps <b>UP</b> -Uplight (solid body)

## Details

**Application Features:** Specification grade, suspended, high performance architectural luminaire. For use in indoor applications where a T8, T5, or T5HO direct/indirect luminaire with maximum uplight as well as glare-free downlight is required. Available as individual fixtures or with end and intermediate units for mounting in continuous rows. Fixtures designed to mount on 4 foot and 8 foot centers.

**Construction:** Durable cold rolled 20 ga. steel body. Sufficient knock-outs provided for connections and through wiring. Fixture is 2 inches in height.

**Finish:** White Powder Coat Finish

**Electrical:** Electronic ballasts are class P, thermally protected.

**Approvals:** Union-made, UL listed, and manufactured in the US.

**Optics:** 95% enhanced anodized aluminum slotted reflector and semi-perforated housing.

**Options:** Emergency Battery Backup, Dimming Ballast, Separate Circuit, Custom Colors, Spade End Caps, Uplight.

**Light Distribution:**  
**Indirect-92% Direct-8%**

Available with either Spade or Bullnose End Caps




Spade



Bullnose

# 508KL

## Dimensions:

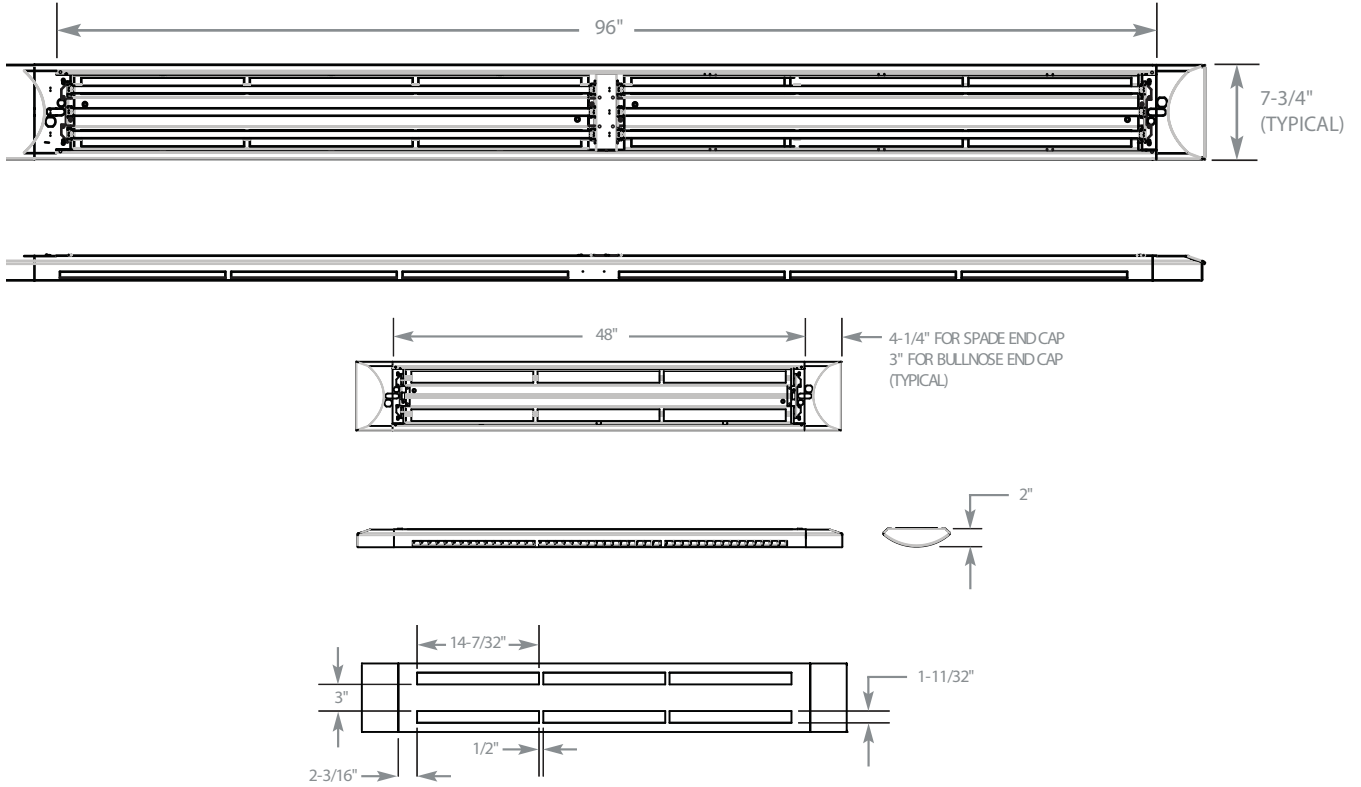

## Hanging Points:

